



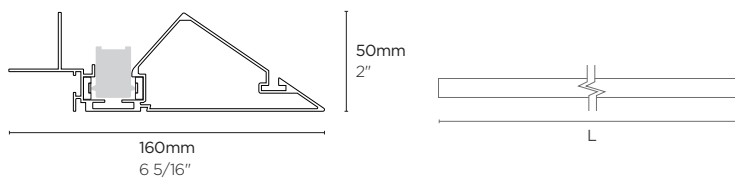

indy-side wide

INFINITY 2.0 SPECIFICATIONS

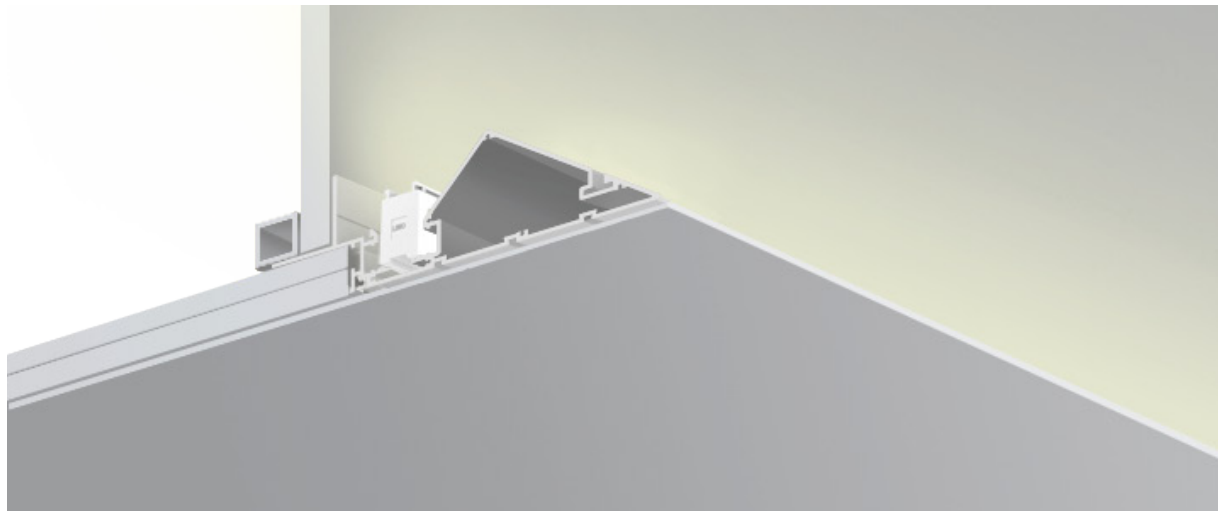

Track Housing Module

Model	Length(mm/inch)	Weight(kg)	Lamp types	IP	Material
ISWT-600	600 23 5/8"	N/A			
ISWT-700	700 27 9/16"	N/A			
ISWT-800	800 31 1/2"	N/A			
ISWT-900	900 35 7/16"	N/A			
ISWT-1000	1000 39 3/8"	N/A	1. Simple	IP20	Track Housing: Anodized aluminium Diffuser: Polycarbonate
ISWT-1100	1100 43 5/16"	N/A	2. Smart Cocktail*		
ISWT-1200	1200 47 1/4"	N/A			
ISWT-2400	2400 94 1/2"	N/A			
ISWT-90H-IN	660 x 501 26" x 19 3/4"	N/A			
ISWT-90H-OUT	714 x 555 28 1/8" x 21 7/8"	N/A			

*Available 3rd quarter of 2016.



IST-90H-IN

IST-90H-OUT





lamp module with indirect diffuser

INFINITY 2.0 SPECIFICATIONS



Lamp Module with Indirect Diffuser

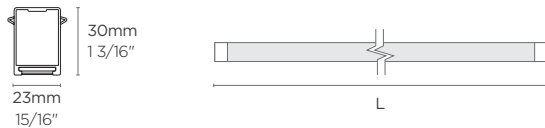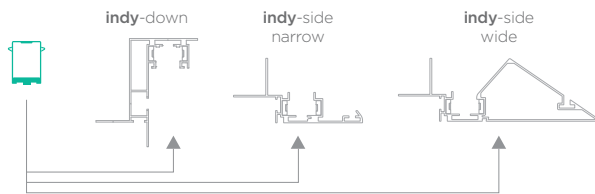

Simple



Model	Length(mm/inch)	Weight(kg)	Wattage(W)	Colour Temp.	CRI	Voltage	Material
IL-600-12W	-30/40/57 598 23 9/16"	0.26	12				
IL-700-14W	-30/40/57 698 27 1/2"	0.30	14				
IL-800-16W	-30/40/57 798 31 7/16"	0.32	16	3000K 30	Ra≥80	100-240VAC (Voltage Range: 85-264VAC), 50-60Hz	Aluminium, Polycarbonate
IL-900-18W	-30/40/57 898 35 3/8"	0.36	18	4000K 40			
IL-1000-20W	-30/40/57 998 39 5/16"	0.38	20	5700K 57			
IL-1100-21W	-30/40/57 1098 43 1/4"	0.42	21				
IL-1200-22W	-30/40/57 1198 47 3/16"	0.44	22				

Ex) 900mm, 4000K: IL-900-18W-40

Smart Cocktail*

*Available 3rd quarter of 2016.




Model	Length(mm/inch)	Weight(kg)	Wattage(W)	Light adjustability	CRI	Voltage	Material
IL-600-14W-SC	598 23 9/16"	0.26	14				
IL-700-16W-SC	698 27 1/2"	0.30	16				
IL-800-18W-SC	798 31 7/16"	0.32	18		Ra≥80	100-277VAC (Voltage Range: 85-305VAC), 50-60Hz	Aluminium, Polycarbonate
IL-900-21W-SC	898 35 3/8"	0.36	21				
IL-1000-24W-SC	998 39 5/16"	0.38	24				
IL-1100-26W-SC	1098 43 1/4"	0.42	26				
IL-1200-28W-SC	1198 47 3/16"	0.44	28				
				RGB colours (16million), Warm-Cool (3000K-6500K), Dimming.			

Ex) 900mm: IL-900-21W-SC

common accessories

INFINITY 2.0 SPECIFICATIONS


i33 Mini End cap



Model	Colour	Material
i33ME-WHT	White	PC

Note:
 - Sold in pairs.
 - 1 pair required for every light line.
 - Includes all hardware to connect to Track Housing.


AC Mid-Connector



Model	Material
ACMC	PC

Note:
 - Sold in pairs.
 - 1 pair required for every Track Housing connection.


90° Horizontal AC Mid-Connector



Model	Material
ACMC-90H	PC

Note:
 - Sold in pairs.
 - 1 pair required for every 90° Horizontal Track Housing connection.
 - 1 pair included with 90° Track Housing Module.


90° Vertical AC Mid-Connector



Model	Material
ACMC-90V	PC

Note:
 - Sold in pairs.
 - 1 pair required for every 90° Vertical Track Housing connection.
 - 1 pair included with 90° Track Housing Module.


Linear Track Housing Connector



Model	Material
THC	AL

Note:
 - Sold in pairs.
 - 1 pair required for every Track Housing connection.
 - Includes all hardware to connect to Track Housing.


90° Horizontal Track Housing Connector



Model	Material
THC-90H	AL

Note:
 - Sold in pairs.
 - 1 pair required for every 90° Horizontal Track Housing connection.
 - Includes all hardware to connect to Track Housing.
 - 1 pair included with 90° Track Housing Module.

90° Vertical Track Housing Connector




Model	Material
THC-90V	AL

Note:
 - Sold in pairs.
 - 1 pair required for every 90° Vertical Track Housing connection.
 - Includes all hardware to connect to Track Housing.
 - 1 pair included with 90° Track Housing Module.

mounting accessories

INFINITY 2.0 SPECIFICATIONS

Track Housing Mounting Screw



Note:
 These screws are not included. Depending on the material the track housing is mounted on, the type of screw required may vary. Please purchase the screws locally.




remote control*

SPECIFICATIONS

*Available 3rd quarter of 2016.

Wifi RF smart system

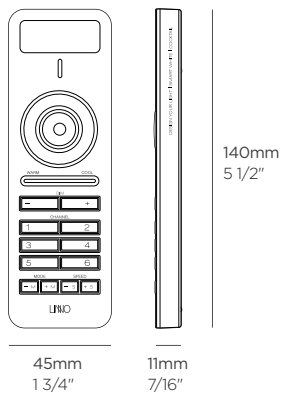

Black remote control



Model	Operating Frequency	Range	Battery	Average Charge Time	Battery Life
RCB	2,400 - 2,483.5 MHz	20-25m	5V rechargeable	2.5 hours	6 hours of continuous use

Material	Battery Standby Period	Finish	Compatibility	Transmission	Included
ABS plastic	6 months	Black	Smart White Smart Cocktail	Radio frequency (Zigbee protocol)	USB charging cable, wall bracket, 1 screw